

PUTTING ON THE PERCKO EXOSKELETON

WE INVITE YOU TO WATCH THE FITTING VIDEO



BEFORE PUTTING ON THE EXOSKELETON

- Fully loosen straps no.1, no.2 and no.3;
- Empty your pockets;
- Check that the elastics cross in an X on your back.

THE MAIN POINTS TO WATCH OUT FOR

You cannot do a squat;

- Strap no.1 too tight.

The plastic part rubs under your armpits;

- Strap no.2 too tight.

The assistance is too strong, it feels uncomfortable;

- Strap no.3 too tight.

Put on the exoskeleton shoulder straps before starting the adjustments.

Tip for adjusting your exoskeleton properly: always adjust progressively, in small increments.

THE 3 STEPS TO FOLLOW AND CHECK

1. THE THIGHS *Strap 1*




- Position the thigh harness high on the thigh before adjusting;
- Check that each strap is paired with the one bearing the same marking: D with D, G with G (D = right, G = left);
- Tighten straps no.1. You should be able to fit at least one finger between the strap and your thigh, without the harness slipping;
- ⚠ Depending on your body shape, you may fit more than one finger: this is normal. What matters is that the harness does not slip.

2. SHOULDER STRAPS *Strap 2*



- Tighten straps no.2 slightly towards the back;
- Do a squat (bend your knees), then a few torso rotations: you should retain complete freedom of movement.

3. THE ELASTICS *Strap 3*

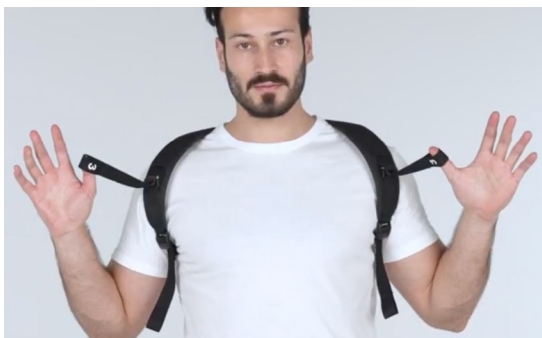

- Activate them progressively by pulling on straps no.3. The setting is right when you feel light assistance, like a spring sensation, as you bend down and come back up;
- To loosen the exoskeleton, unclip the fasteners while lifting one leg after the other.

BETWEEN TWO TASKS, DEACTIVATE THE ASSISTANCE IN ONE MOVE:

Grab the plastic part of strap no.2 and pull it slightly upwards, as if loosening a backpack strap: the assistance is deactivated. / Do not touch straps no.1 and no.3: those are your settings. / To re-arm the exoskeleton, simply retighten strap no.2.